


Product composition

2.5mm x 180mm x 1200mm

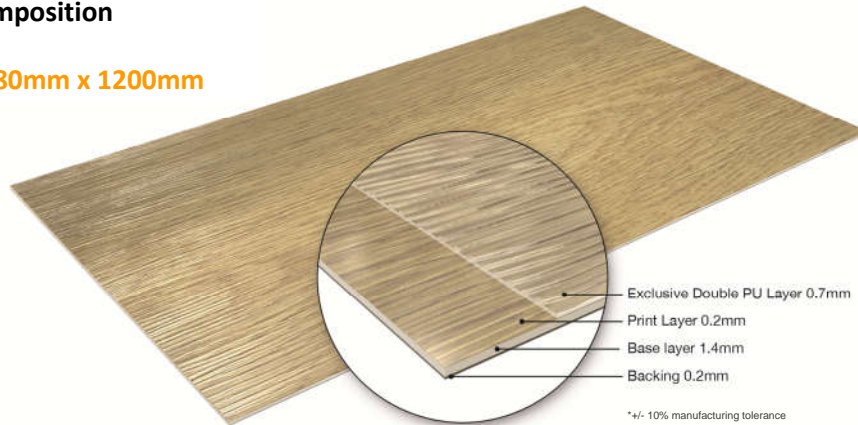

Environmental

- Free of harmful phthalate plasticizers: DOP, BBP, DBP, DIDP, DnOP, DINP
- Low TVOCs
- Manufactured under high efficiency, low wastage, modern factory conditions

Durability

- Exclusive double wear layer creating a scratch/stain resistant surface
- Factory finished. Easy clean and low maintenance. No polish treatment needed after installation

Technical

| Characteristic | Standard | Results |
|---------------------------|----------------|------------------|
| Type of flooring | EN ISO 10582 | PVC Heterogenous |
| Surface treatment | NA | PUR |
| Size | EN ISO 24342 | <0.15% |
| Straightness & Squareness | EN ISO 24342 | <0.35% |
| Classification | EN 685 | Class 23/33/42 |
| Overall thickness | EN ISO 24346 | 2.5mm |
| Wear layer thickness | EN ISO 24340 | 0.70mm |
| Wear resistance | EN 660-2 | T |
| Residual indentation | EN ISO 24343-1 | <0.1mm |
| Dimensional indentation | EN ISO 23999 | <0.25% |
| Curling | EN ISO 23999 | <2mm |
| Colour Fastness to light | EN ISO 105-B02 | >6 |
| Castor chair test | EN ISO 4918 | No Change |
| Burning characteristics | EN 13501-1 | Bfl-s1 |
| Chemical resistance | EN ISO 26987 | No Change |
| Slip resistance | EN 13893 | Class DS |
| | DIN 51130 | R9 |