




SPECIFICATION SHEET

FLOORS FOR PAWS
style & durability

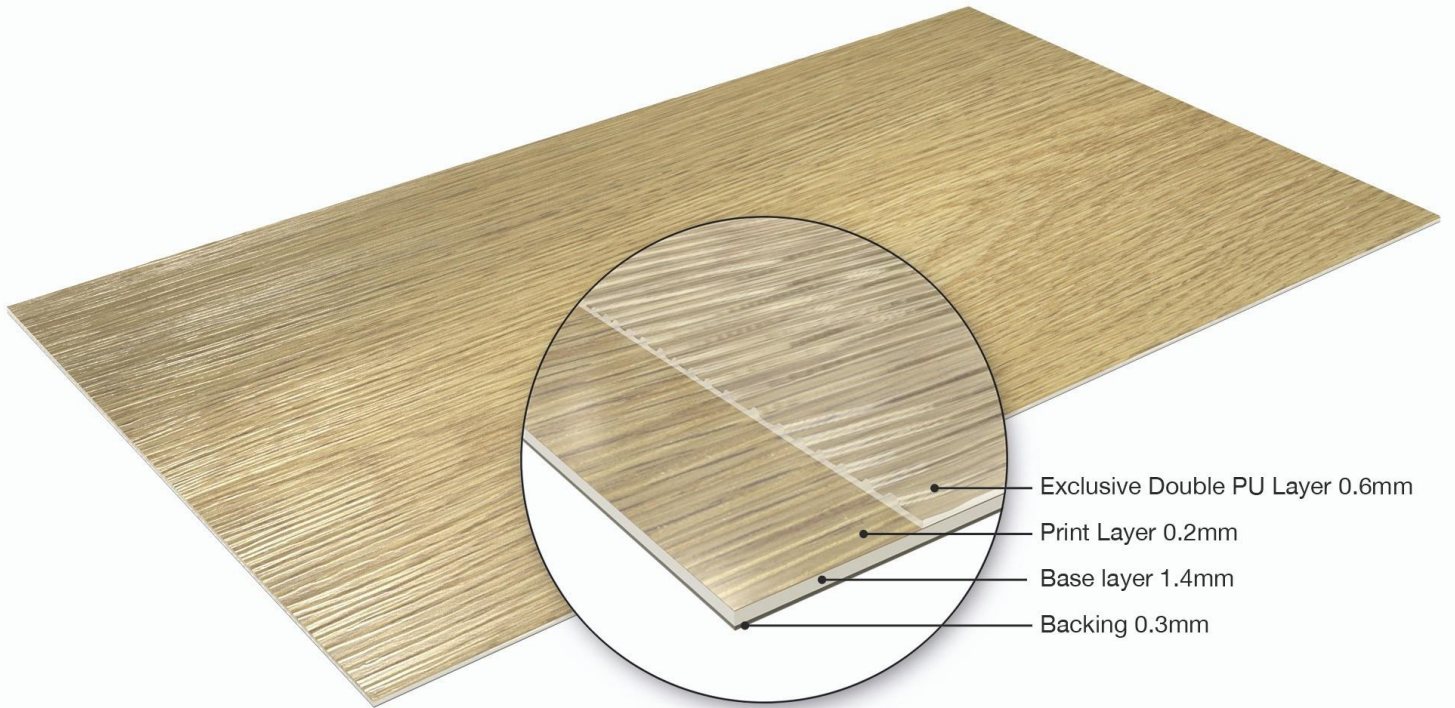


M50/ RUBBER/ PLASTICS/ CORK/ LINO/ CARPET TILING/ SHEETING

NAME:	FLOORS FOR PAWS
WEB:	WWW.FLOORSFORPAWS.COM
TEL:	+44 (0)1937 830948
PRODUCT REFERENCE:	FLOORS FOR PAWS, 85 PTV, WOOD EFFECT
WEAR LAYER:	0.6MM
THICKNESS:	2.5MM
PLANK SIZE:	1200MM X 180MM
COLOUR:	-----
ADHESIVE:	FBALLS F48 PLUS

Product composition

2.5mm x 180mm x 1200mm

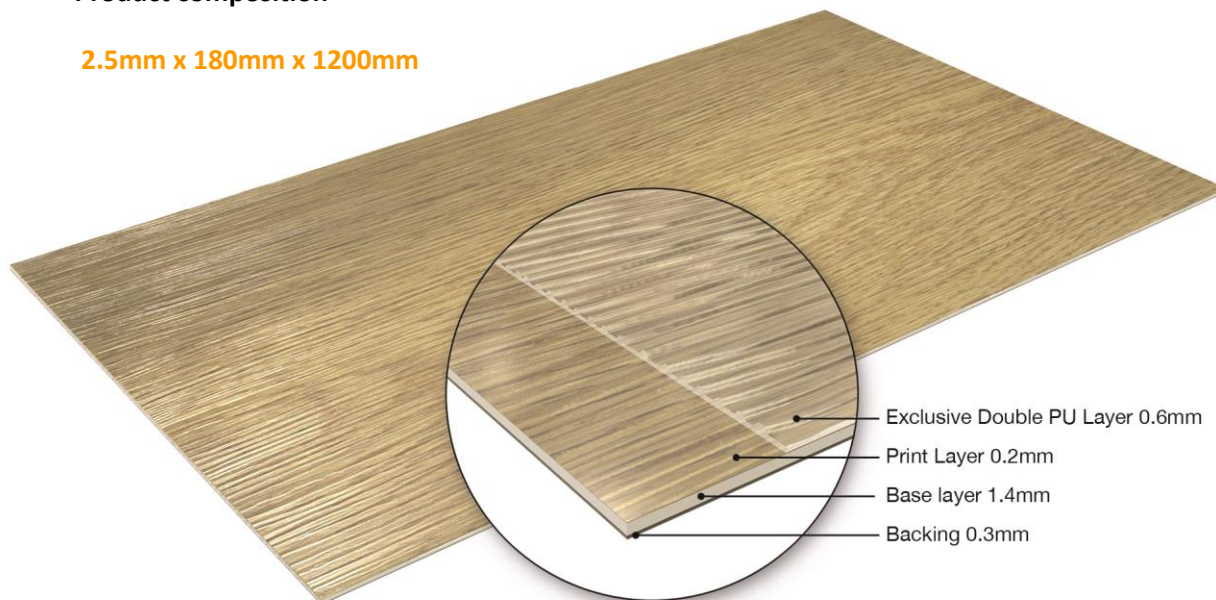


Durability

- Exclusive double wear layer creating a scratch/stain resistant surface
- Factory finished. Easy clean and low maintenance. No polish treatment needed after installation

Technical

Characteristic	Standard	Results
Type of flooring	EN ISO 10582	PVC Heterogenous
Surface treatment	NA	PUR
Size	EN ISO 24342	<0.15%
Straightness & Squareness	EN ISO 24342	<0.35%
Classification	EN 685	Class 23/33/42
Overall thickness	EN ISO 24346	2.5mm
Wear layer thickness	EN ISO 24340	0.60mm
Wear resistance	EN 660-2	T
Residual indentation	EN ISO 24343-1	<0.1mm
Dimensional indentation	EN ISO 23999	<0.25%
Curling	EN ISO 23999	<2mm
Colour Fastness to light	EN ISO 105-B02	>6
Castor chair test	EN ISO 4918	No Change
Burning characteristics	EN 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	No Change
Slip resistance	EN 13893	Class DS
Pendulum test	BS 7976	85 PTV

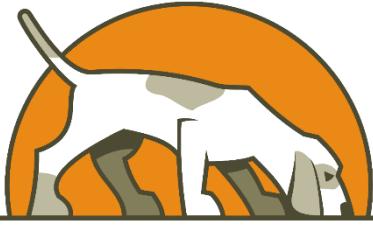

FLOORS FOR PAWS
style & durability

SPECIFICATION SHEET



M50/ RUBBER/ PLASTICS/ CORK/ LINO/ CARPET TILING/ SHEETING

NAME:	FLOORS FOR PAWS
WEB:	WWW.FLOORSFORPAWS.COM
TEL:	+44 (0)1937 830948
PRODUCT REFERENCE:	FLOORS FOR PAWS, >36 WET & DRY PTV, STONE
WEAR LAYER:	0.6MM
THICKNESS:	2.5MM
PLANK SIZE:	458MM X 458MM (PYRANEEES, WHIPPET, CAIRN TERRIER, TAMASKAN)
PLANK SIZE:	305MM X 610MM (IRISH WOLFHOUND, POINTER))
COLOUR:	-----
ADHESIVE:	FBALLS F48 PLUS

Technical Specification

Stone Effect Product sizes

2.5mm x 458mm x 458mm

2.5mm x 305mm x 610mm



Durability

- Exclusive double wear layer creating a scratch/stain resistant surface
- Factory finished. Easy clean and low maintenance. No polish treatment needed after installation

Technical

Characteristic	Standard	Results
Type of flooring	EN ISO 10582	PVC Heterogenous
Surface treatment	NA	PUR
Size	EN ISO 24342	<0.15%
Straightness & Squareness	EN ISO 24342	<0.35%
Classification	EN 685	Class 23/33/42
Overall thickness	EN ISO 24346	2.5mm
Wear layer thickness	EN ISO 24340	0.60mm
Wear resistance	EN 660-2	T
Residual indentation	EN ISO 24343-1	<0.1mm
Dimensional indentation	EN ISO 23999	<0.25%
Curling	EN ISO 23999	<2mm
Colour Fastness to light	EN ISO 105-B02	>6
Castor chair test	EN ISO 4918	No Change
Burning characteristics	EN 13501-1	Bfl-s1
Chemical resistance	EN ISO 26987	No Change
Slip resistance PTV	BS 7976	>36 Wet & Dry
VOC	AgBB VOC test	Very Low