


## SPECIFICATION SHEET

**FLOORS FOR PAWS**  
*style & durability*

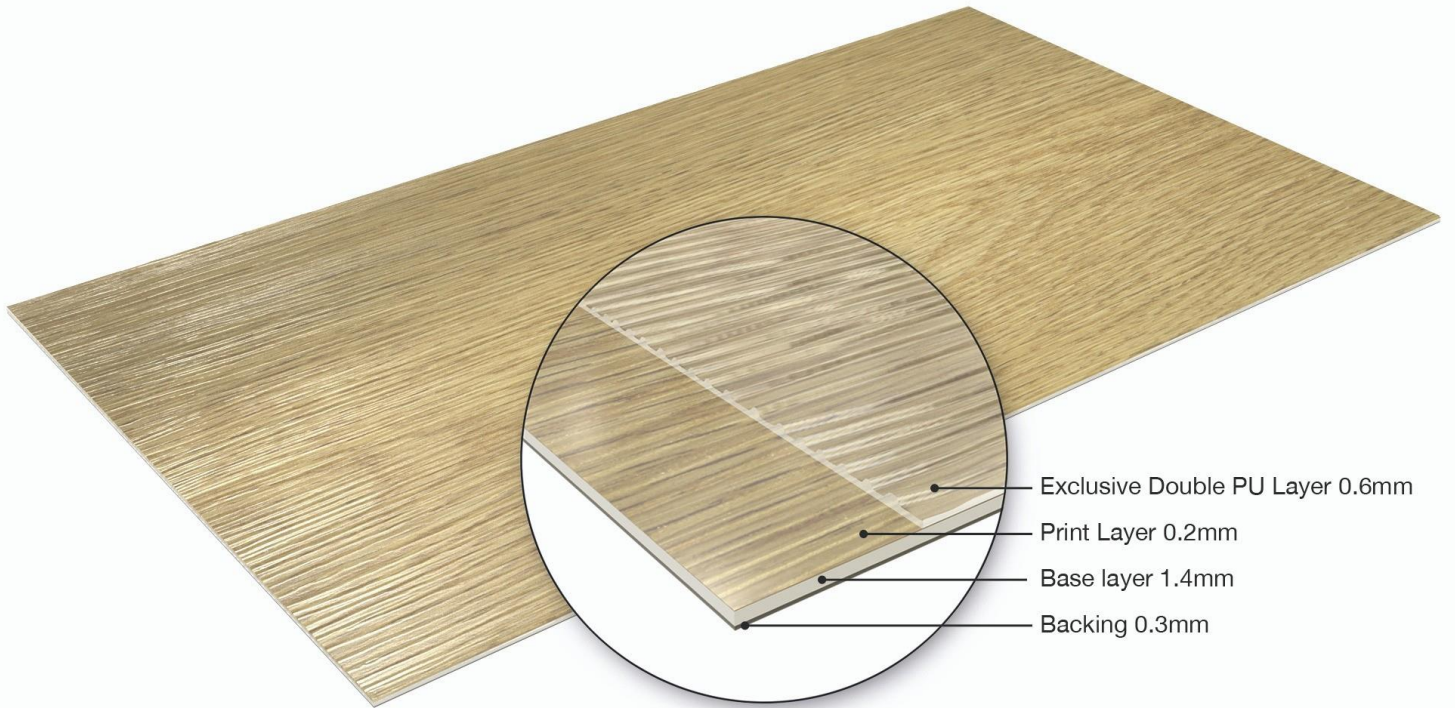


### M50/ RUBBER/ PLASTICS/ CORK/ LINO/ CARPET TILING/ SHEETING

|                           |   |
|---------------------------|---|
| <b>NAME:</b>              | <b>FLOORS FOR PAWS</b>                      |
| <b>WEB:</b>               | <b>WWW.FLOORSFORPAWS.COM</b>                |
| <b>TEL:</b>               | <b>+44 (0)1937 830948</b>                   |
| <b>PRODUCT REFERENCE:</b> | <b>FLOORS FOR PAWS, 85 PTV, WOOD EFFECT</b> |
| <b>WEAR LAYER:</b>        | <b>0.6MM</b>                                |
| <b>THICKNESS:</b>         | <b>2.5MM</b>                                |
| <b>PLANK SIZE:</b>        | <b>1199 MM X 181 MM</b>                     |
| <b>COLOUR:</b>            | -----                                       |
| <b>ADHESIVE:</b>          | <b>UZIN KE-49</b>                           |

## Product composition

2.5mmx 181mm x 1199mm

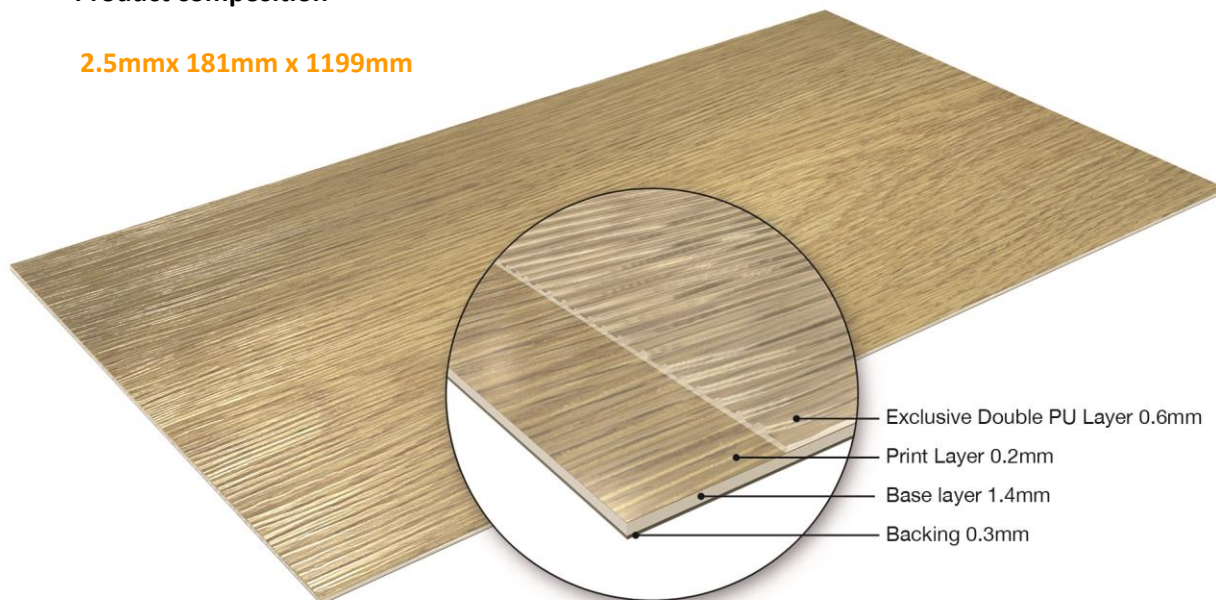


## Durability

- Exclusive double wear layer creating a scratch/stain resistant surface
- Factory finished. Easy clean and low maintenance. No polish treatment needed after installation

## Technical

| Characteristic            | Standard       | Results          |
|---------------------------|----------------|------------------|
| Type of flooring          | EN ISO 10582   | PVC Heterogenous |
| Surface treatment         | NA             | PUR              |
| Size                      | EN ISO 24342   | <0.15%           |
| Straightness & Squareness | EN ISO 24342   | <0.35%           |
| Classification            | EN 685         | Class 23/33/42   |
| Overall thickness         | EN ISO 24346   | 2.5mm            |
| Wear layer thickness      | EN ISO 24340   | 0.60mm           |
| Wear resistance           | EN 660-2       | T                |
| Residual indentation      | EN ISO 24343-1 | <0.1mm           |
| Dimensional indentation   | EN ISO 23999   | <0.25%           |
| Curling                   | EN ISO 23999   | <2mm             |
| Colour Fastness to light  | EN ISO 105-B02 | >6               |
| Castor chair test         | EN ISO 4918    | No Change        |
| Burning characteristics   | EN 13501-1     | Bfl-s1           |
| Chemical resistance       | EN ISO 26987   | No Change        |
| Slip resistance           | EN 13893       | Class DS         |
| Pendulum test - dry       | BS 7976        | 85 PTV           |

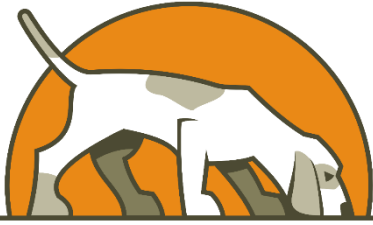

**FLOORS FOR PAWS**  
*style & durability*

## SPECIFICATION SHEET



### M50/ RUBBER/ PLASTICS/ CORK/ LINO/ CARPET TILING/ SHEETING

|                           |   |
|---------------------------|---|
| <b>NAME:</b>              | <b>FLOORS FOR PAWS</b>  |
| <b>WEB:</b>               | <b>WWW.FLOORSFORPAWS.COM</b>  |
| <b>TEL:</b>               | <b>+44 (0)1937 830948</b>   |
| <b>PRODUCT REFERENCE:</b> | <b>FLOORS FOR PAWS, &gt;36 WET &amp; DRY PTV, STONE</b>               |
| <b>WEAR LAYER:</b>        | <b>0.6MM</b>  |
| <b>THICKNESS:</b>         | <b>2.5MM</b>  |
| <b>PLANK SIZE:</b>        | <b>458MM X 458MM (PYRANEES, WHIPPET, CAIRN<br/>TERRIER, TAMASKAN)</b> |
| <b>PLANK SIZE:</b>        | <b>305MM X 610MM (IRISH WOLFHOUND, POINTER))</b>                      |
| <b>COLOUR:</b>            | _____   |
| <b>ADHESIVE:</b>          | <b>UZIN KE-49</b>   |



# Technical Specification

## Stone Effect Product sizes

2.5mm x 458mm x 458mm

2.5mm x 305mm x 610mm



## Durability

- Exclusive double wear layer creating a scratch/stain resistant surface
- Factory finished. Easy clean and low maintenance. No polish treatment needed after installation

## Technical

| Characteristic            | Standard       | Results          |
|---------------------------|----------------|------------------|
| Type of flooring          | EN ISO 10582   | PVC Heterogenous |
| Surface treatment         | NA             | PUR              |
| Size                      | EN ISO 24342   | <0.15%           |
| Straightness & Squareness | EN ISO 24342   | <0.35%           |
| Classification            | EN 685         | Class 23/33/42   |
| Overall thickness         | EN ISO 24346   | 2.5mm            |
| Wear layer thickness      | EN ISO 24340   | 0.60mm           |
| Wear resistance           | EN 660-2       | T                |
| Residual indentation      | EN ISO 24343-1 | <0.1mm           |
| Dimensional indentation   | EN ISO 23999   | <0.25%           |
| Curling                   | EN ISO 23999   | <2mm             |
| Colour Fastness to light  | EN ISO 105-B02 | >6               |
| Castor chair test         | EN ISO 4918    | No Change        |
| Burning characteristics   | EN 13501-1     | Bfl-s1           |
| Chemical resistance       | EN ISO 26987   | No Change        |
| Slip resistance PTV       | BS 7976        | >36 Wet & Dry    |
| VOC                       | AgBB VOC test  | Very Low         |